


E-Line 82-11-2

GORMAN-RUPP E-LINE GENERAL DESCRIPTION



The Gorman-Rupp E-Line 82-11-2 is an electric driven wet self-priming pump set for pumping clean and dirty water and for light or non-frequent use of abrasive fluids.

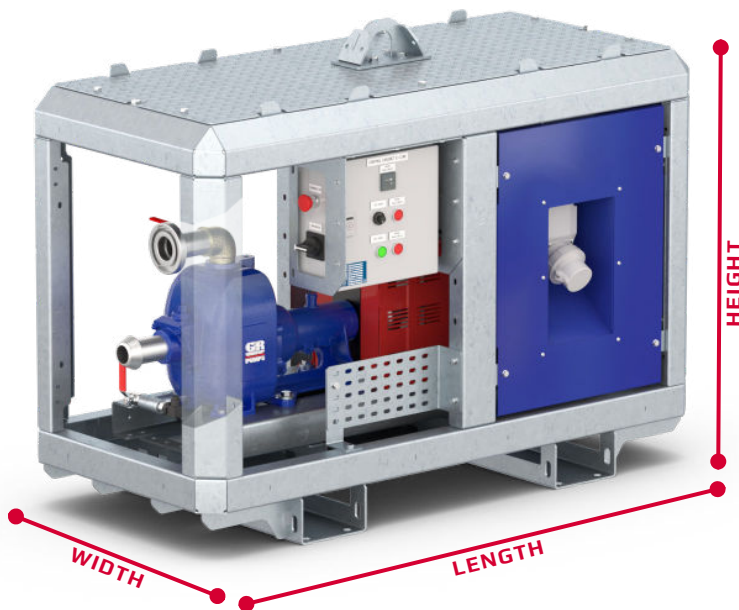

WEIGHT

Approx. 440 kg

OPERATION

Control panel with main switch, emergency switch, pump on/off and speed control.

COUPLING AND GUARD

Rubber tyre coupling, steel guard RAL 3002 (red)

CHASSIS

Heavy gauge steel chassis, fully galvanized. Steel protective panels, galvanized and powder coated RAL 5003



PUMP

Gorman-Rupp 82H52 self-priming centrifugal pump



ELECTRIC MOTOR

11 kW IE3 premium efficiency electric motor with integrated variable frequency drive (VFD)



IMPELLER

7.12 " Impeller made of cast iron



PERFORMANCE

Max. 47,5 m³/h flow or 63 mWc discharge head



DIMENSIONS

2" Perrot Male connection suction side, 19 mm solid handling capacity
2" Storz, camdistance 81 mm connection discharge side
L: 1.48m W: 0,68m H: 1,09m




SOUND

max. 75 dB, measured at 1 meter distance and 1 meter height



WARRANTY

1-year Gorman-Rupp warranty on the pump, 1-year on the motor and other components

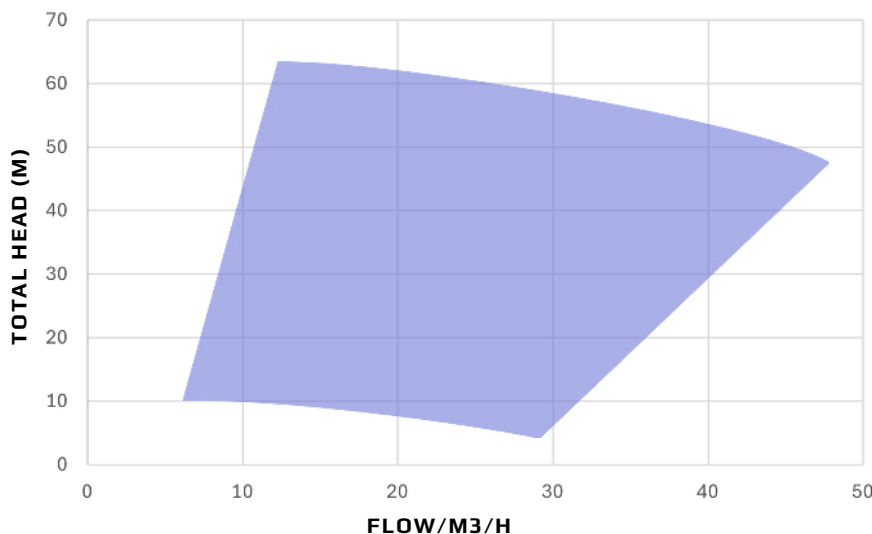

*Pump performance curve is based on water with a SG=1.0 and without additional accessories.

E line
Electric Powered Pumps

The Pump People®

WHERE BLUE MEETS GREEN



E-Line 82-11-2

GORMAN-RUPP E-LINE TECHNICAL SPECIFICATIONS



PUMP

Solids handling
Max. working pressure
Impeller
Pump shaft bearings
Bearing lubrication
Shaft sealing
Fasteners
Oil sight glasses
Pump casing
Impeller
Pump shaft
Shaft sleeve
Wear plate
Check valve

E-LINE 82-11-2

3/4" (19,1mm)
1007 kPa
7,12" Impeller made of cast iron
Open single row ball bearings
SAE30
Mechanical seal
Steel, nickel-plated
Available
Gray Iron 30
Gray Iron 30
Carbon Steel 1045/1046
Alloy Steel 4130
Carbon Steel ASTM A36
Buna-N with Nylon reinforcement,
Gray Iron 30 and steel parts
Gray Iron 30
Cork and natural fibers
Buna N



Electric Powered Pumps

CHASSIS DESIGN

Chassis	Heavy gauge steel
Corrosion protection	Hot-dip galvanized
Protective panels	Steel protective panels, galvanized and powder coated RAL 5003

ELECTRIC MOTOR

Brand	HOYER
Maximum Power	11 kW
Efficiency Class	IE3 Premium Efficiency
Variable Frequency Drive (VFD)	Yes, integrated

OPTIONS

Discharge Check Valve
Air Release Valve
High Temperature Shutdown Kit
Remote Control
Float Switch
Level Sensor
Custom Colors

CONTROL PANEL

Functionalities	Main switch, emergency switch, pump on/off and speed control
IP Rating of the Cabinet	IP44

